


Drill tape data			
Tool Code	Hole Size	Sym bol	Hole Count


PARTS WITH 'STANDARD' .4" SPACING

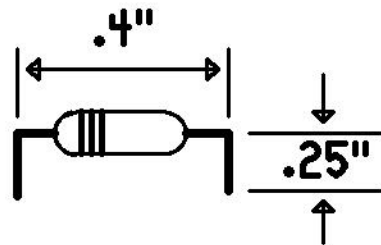

- QTY=500 100 OHM 1/4 WATT
- QTY=500 4.7K OHM 1/4 WATT
- QTY=1000 10K OHM 1/4 WATT


- QTY=500 .47uh AXIAL INDUCTOR
- QTY=500 .56uh AXIAL INDUCTOR
- QTY=500 10uh AXIAL INDUCTOR

Board type FR4
 Board thickness .062"
 Copper weight 2oz
 Layer count 2
 All dimensions are in inches
 Board should have green solder mask over bare copper (SMOBC) with white silk screening on top
 View is from the top side of the board

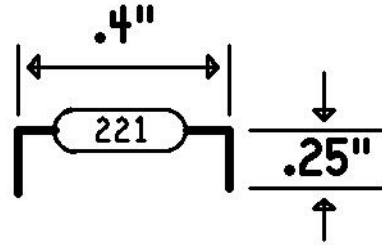

- QTY=1000 220pf AXIAL CAPACITOR

PARTS WITH OFF CENTER LEADS FOR HAIRPIN FORMING

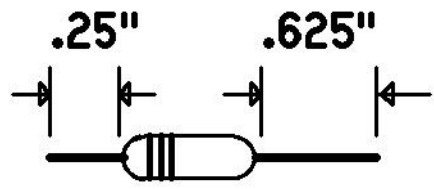

- QTY=500 0 OHM JUMPER
- QTY=500 51 OHM 1/4 WATT
- QTY=500 2.2uh AXIAL INDUCTOR

Co	QRPme		
Title	World's BIGGEST Buildathon		
Board	component prep	Revision	A
Drawn	W1REX	Size	A
Date	5/15/2016	Sheet	1 of 1